


SmartLane®

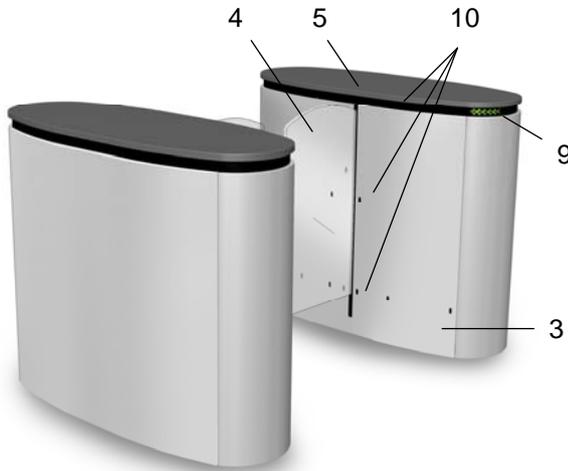


Designed for intensive use in intra-building sites, the SmartLane 910 security entrance lane ensures dissuasive control of pedestrians taller than 1 m, with or without luggage, in both directions.

Its wide corridor facilitates the passage of less able people, wheelchairs, carriages and other cumbersome objects.

With its mechanical design and embedded electronics, the equipment guarantees an average level of security (prevention of fraud) and a high level of safety (protection of users during operation).

The cabinet can be installed in series, in which case it will be necessary to define left-hand, right-hand and intermediate cabinet (with a mobile leaf on both sides of the gate). The latter can be hybrid (left and right leaves of different widths) in order to ensure compatibility with the SmartLane 90x range.

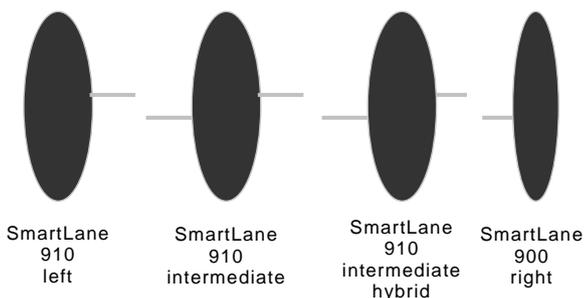

Description

1. Self-supporting frame (made from galvanized steel) integrating the electromechanical drive assembly for each mobile leaf, the photoelectric cells for the detection of the presence of users, and the control boards.
2. Brushed AISI 304L stainless steel housing.
3. Brushed AISI 304L stainless steel side panels with key lock, allowing easy access to the electromechanical unit and the control boards.
4. Monolithic clear 12 mm thick tempered glass leaf, retracting completely into the body on opening.
5. Black laminate top cover (stainless steel around the fixed glass if any: i.e. for mobile leaf height > 1000 mm).
6. Electromechanical unit consisting of:
 - A three-phase asynchronous reduction motor.
 - Secondary transmission with crank-and-rod linkage ensuring perfect mechanical locking in both extreme positions.
 - A device for automatic opening of the mobile leaves in the event of a power failure.
 - A variable-speed controller ensuring progressive accelerations and gradual decelerations, for a movement without vibration and for protection of the mechanism and the users in the event of contact with the mobile leaves.
 - An inductive sensor controlling the position of the mobile leaf.
7. Dual AS1300 control logic ensuring the management of the gate, as well as for supporting various control options and/or accessories. A LCD allows navigation in the drop-down menus and the modification of certain parameters.
8. Transfer of information through potential-free contacts: passage authorization, passage information, defect, state of the gate (free, prohibited, alarm ...).
9. Orientation pictogram, indicating the state of the gate to the user (in service or out of service)....
10. Photoelectric cells for detecting presence, ensuring the control of the movement of the users through the gate as well as their safety during the movements of the mobile leaves.

Technical characteristics (standard)

- Electrical supply: single-phase 230 VAC + ground, 50/60 Hz.
(do not connect to a floating network or to high impedance earthed industrial distribution network)
- Nominal consumption per lane: 250 W.
- Three-phase asynchronous 120 W motor.
- Ambient T° of operation: from 0 to +50°C.
- Relative humidity max: 95%, without condensation.
- Net weight of a cabinet, depending on its configuration (left, right, intermediate): between 180 and 250 kg.
- Opening time: 0.7 s.
Closing time: 0.8 s.
(minimum movement times, configurable. These times do not take into account the reaction of the access control system. The passage request memory function makes it possible to accelerate the flow: no closing between 2 requests)
- MCBF (average number of cycles between breakdowns), when respecting recommended maintenance: 2.500.000.
- IP40.
- CAN bus communication between the various modules making up the passage.
- Conforms to CE standards.
The Silicon protection strip on mobile leaf option is necessary to comply with the norms related to impact force.

Options

- Integration of access control systems (badge reader, etc.).
- Incorporation in the top cover of an operation pictogram, indicating the procedure to the user (waiting for a passage authorization, passage authorized, passage refused).
- Mobile leaf height: 1200, 1700 or 1900 mm and fixed leaf with equivalent height.
- Silicon protection strip on mobile leaf, for heights 1200, 1700, 1900 mm.
- Cells for fixed leaves.
- Child protection cells.
- Trolley protection cells.
- Free opening cells (wheelchair detection).
- Personalized adhesive logo on fixed or mobile leaf.
- Painted stainless steel side panels (RAL colors).
- Wooden top cover (laminated beech).
- Stainless steel top cover.
- Power supply 120 VAC-60 Hz.

Standard dimensions (mm)

